

AEROSOL FIRE SUPPRESSION SYSTEM

Defender Aerosol Fire Suppression Units are competitive

- ▶ DA 1100: 1100 grams, 6.40 m³ protected area
- ▶ DA 1700: 1700 grams, 9.88 m³ protected area
- ▶ DA 2200: 2200 grams, 12.8 m³ protected area
- ▶ DA 4400: 4400 grams, 25.58 m³ protected area
- ▶ DA 5500: 5500 grams, 34.4 m³ protected area


* (For further technical details and conditions, please contact us.)

Defender Aerosol Fire Suppression Units have KIWA approvals

- ▶ BRL-K23001/06:2020 Aerosol extinguisher evaluation guideline for product certification of fixed dry aerosol extinguishing components
- ▶ EN 15276-1:2019 Fixed firefighting systems - Condensed aerosol extinguishing systems - Part 1: Requirements and test methods for components;
- ▶ ISO 15779:2011 Condensed aerosol extinguishing systems - Requirements and test methods for the design, installation and maintenance of components and systems - General requirements



Defender Aerosol Fire Suppression Units are stainless steel

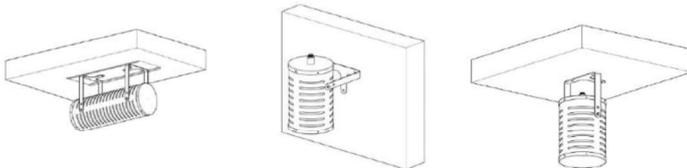

Defender Aerosol Fire Suppression Units have best detection and remote monitoring

